



|   | MWP-6   |                  |                  |                   |
|---|---|------------------|------------------|-------------------|
| Screen Dimension(inch)                        | 90  | 80               | 70               | 55                |
| Display Dimension(mm) (WxH)                   | 2000 x 1175                                   | 1750 x 1000      | 1000 x 1475      | 750 x 1175        |
| Resolution (dot) (WxH)                        | 320 x 188                                     | 280 x 160        | 160 x 236        | 120 x 188         |
| Profile Dimension (mm)(WxH)                   | 2016 x 1292 x 78                              | 1766 x 1117 x 78 | 1016 x 1592 x 78 | 766 x 1291.5 x 78 |
| LED Specification                             | 2121  |                  |                  |                   |
| Pixel Pitch (mm)(horizontal/ vertical)        | 6.25 - 6.25                                   |                  |                  |                   |
| Pixel Density (dot/m <sup>2</sup> )           | 25560   |                  |                  |                   |
| Transparency Rate                             | 95%   |                  |                  |                   |
| Brightness(cd/m <sup>2</sup> )                | ≥4500 (White Light)                           |                  |                  |                   |
| Maximum Power Consumption (w/m <sup>2</sup> ) | 865   |                  |                  |                   |
| Average Power Consumption (w/m <sup>2</sup> ) | 330   |                  |                  |                   |
| Color Temperature(K)                          | 3000 - 10000                                  |                  |                  |                   |
| Scanning Mode                                 | Static Driving (Single Pixel Single Control)  |                  |                  |                   |
| Frame Rate (Hz)                               | 60 - 120                                      |                  |                  |                   |
| Encapsulation Type                            | Light Board & Driving Board Integrated        |                  |                  |                   |
| Lifespan                                      | ≥ 100,000.00 hours                            |                  |                  |                   |
| Pixel Configuration                           | 16bit   |                  |                  |                   |
| Input Voltage                                 | AC100 - 240V 50/60Hz                          |                  |                  |                   |
| Working Voltage for Module                    | DC4.2V ±0.2V                                  |                  |                  |                   |
| Working Temperature                           | Temperature -20°C - 50°C                      |                  |                  |                   |
| Working Humidity                              | Humidity 20%RH - 85%RH (Without Condensation) |                  |                  |                   |
| Storage Temperature                           | Temperature -20°C - 60°C                      |                  |                  |                   |
| Storage Humidity                              | Humidity 10%RH - 85%RH (Without Condensation) |                  |                  |                   |
| Protection Degree                             | IP20  |                  |                  |                   |
| Installation Method                           | Hanging Up                                    |                  |                  |                   |
| Installation Environment                      | Indoor  |                  |                  |                   |
| Packing Way                                   | Pearl Cotton+Carton/Flight Case               |                  |                  |                   |

External Dimensions: 55"



External Dimensions: 70"

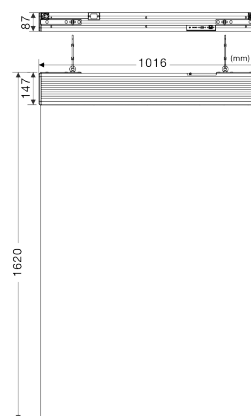

## About TIVA

TIVA is committed to delivering high-quality, innovative display solutions that redefine visual experiences. By prioritizing excellence in both craftsmanship and cutting-edge technology, we ensure every product meets the highest standards of performance and reliability.

2025-08

